

Diva workshop 2016

Diva in 4 dimensions (GODIVA)

Alexander Barth, Aida Alvera-Azcárate, Mohamed Ouberdous,
Charles Troupin, Sylvain Watelet & Jean-Marie Beckers

Acknowledgements: SeaDataNet, EMODnet Chemistry,
EMODnet Biology, STARESO



Outline

Getting Godiva and installation

- Diva input info files

Data sets and domain grid preparation

- Depths data sets extraction

- Topography preparation & Coastlines files generation

- Cleaning of data sets

- Optimisation of L and λ parameters

Producing a climatology

- The analysis

- Using advection fields

- Using reference fields

- Detrending

Installation

See Tutorial on installation or User Guide http://modb.oce.ulg.ac.be/mediawiki/index.php/Diva_documents

Outline

Getting Godiva and installation

- Diva input info files

Data sets and domain grid preparation

- Depths data sets extraction

- Topography preparation & Coastlines files generation

- Cleaning of data sets

- Optimisation of L and λ parameters

Producing a climatology

- The analysis

- Using advection fields

- Using reference fields

- Detrending

Diva input info files

In `input` directory:

- Edit info files and adapt them to your case by providing in the relevant information

File name	content
<code>contour.depth</code>	list file of all depths in meters
<code>NCDFinfo</code>	metadata information for climatology NetCDF files
<code>general_info</code>	information for metadata XML files generation

Outline

Getting Godiva and installation

- Diva input info files

Data sets and domain grid preparation

- Depths data sets extraction**

- Topography preparation & Coastlines files generation

- Cleaning of data sets

- Optimisation of L and λ parameters

Producing a climatology

- The analysis

- Using advection fields

- Using reference fields

- Detrending

Data extraction: input files preparation

In `Climatology` directory:

- `datasource` file: list of paths to `ODV4` spreadsheet(s) from which data sets will be extracted.
- `varlist`, `yearlist` and `monthlist` files.
- `qflist` (quality flags) file if desired.

<code>varlist</code>	<code>yearlist</code>	<code>monthlist</code>
Temperature	19002012	0101
Salinity		0202 0303

Data extraction: driver configuration & divadoall

In **Climatology** directory:

- Edit the **driver** file and put in a flag number for data extraction.

```
extract flag: 1 do it, 0 do nothing, -1 press coord, -10 pressure+Saunders
1
boundary lines and coastlines generation: 0 nothing, 1: contours, 2: UV, 3: 1+2
0
cleaning data on mesh: 1, 2: RL, 3: both, 4: 1 + outliers elimination, 5: =4+2
0
minimal number of data in a layer. If less, uses data from any month.
0
```

Figure 1: driver file configuration example.

- Run **divadoall** or **godiva** (basic error check-up included)
- Rem : do not forget to adapt the PATH (for ex. in **.bashrc**)

A subdirectory **divadata** is created in **input** directory, and contains the data sets.

Outline

Getting Godiva and installation

Diva input info files

Data sets and domain grid preparation

Depths data sets extraction

Topography preparation & Coastlines files generation

Cleaning of data sets

Optimisation of L and λ parameters

Producing a climatology

The analysis

Using advection fields

Using reference fields

Detrending

Topography preparation: Diva-On-Web

http:

[//gher-diva.phys.ulg.ac.be/web-vis/diva.html](http://gher-diva.phys.ulg.ac.be/web-vis/diva.html)

After creating this file :

```
lonmin latmin value  
lonmax latmax value
```

- 1 Upload the file on Diva-On-Web
- 2 Specify the output grid
- 3 Perform the analysis
- 4 Download the NetCDF file [diva_bath.nc](#)
- 5 Put it in `input`

```
swatelet@gher ~/DIVA/diva-4.6.11/DIVA3D/  
divastripped/input $ ../../bin/  
divabath2topogrd.a
```

Topography preparation: Diva-On-Web

=> `topo.grd` and `TopoInfo.dat` are created

If you need to erase zones, just create a mask beforehand :

- Name : masktopo.nc
- Axis : (LON and LAT) or (lon and lat)
- Variable : MASKTOPO
- Convention : 0 is erased, 1 is kept

Topography preparation, old method: `gebcomodif`

For a GEBCO topography file, use the script file `gebcomodif` to:

- Eliminate header lines
- Change depth values from negative to positive values
- Change comas to dots in decimal numbers
- Change longitude values from $[0:360]$ to $[-180:180]$ range
- Mask rectangle regions by giving coordinates in a `takeout.coord` file

Topography preparation

In `input`:

- Provide a topography file named `topogebco.asc` extracted from GEBCO Global Elevation Data.

In the `Climatology` directory:

- Provide a `takeout.coord` file:


Minlon1	Maxlon1	Minlat1	Maxlat1
Minlon2	Maxlon2	Minlat2	Maxlat2
Minlon3	Maxlon3	Minlat3	Maxlat3
.	.	.	.
.	.	.	.

- Run `gebcomodif` script file.


A `topo.gebco` file is generated in `input`.

Masking regions in topography

Coastlines with full topography

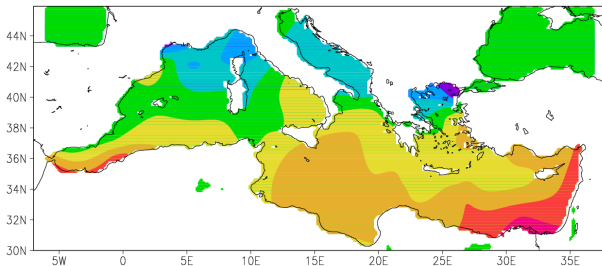

Coastlines with masked topography

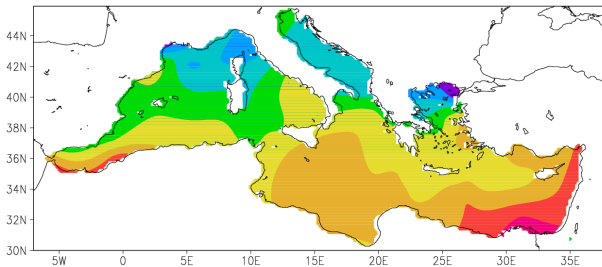

Example of topography preparation

- In `input`, we provide `topogebco.asc` covering the Mediterranean Sea area: 30°N to 46°N and 6°W to 37°E.
- In `Climatology`, we provide a `takeout.coord` file:

```
-6. -1. 42. 46.  
26.5 40. 40. 46.  
5. 9. 33. 35.  
20. 30. 30. 30.5  
35. 37. 31. 33.
```

After running the command `gebcomodif` in `Climatology` directory, we obtain a `topo.gebco` in `input` directory.

- Or you can extract topography from `diva-on-web` !

Coastline files generation: input files

In `input` directory provide:

- (a) a `topo.gebco` file
- (b) a `topo.dat` file
- (c) `topo.grd` + `TopoInfo.dat` files
- the `contour.depth` file
- a `param.par` file

OR
OR

```
33.966702 35.116699 12.000000
33.983299 35.116699 30.000000
34.000000 35.116699 51.000000
34.016701 35.116699 90.000000
34.033298 35.116699 179.000000
34.049999 35.116699 382.000000
34.066700 35.116699 543.000000
34.083302 35.116699 640.000000
34.099998 35.116699 691.000000
```

[topo.gebco](#)

[Contour.depth](#)

```
3000
2500
2000
1750
1500
1400
1300
1200
1100
1000
900
800
700
600
500
400
300
250
200
150
125
100
75
50
30
20
10
0
```

```
# Correlation Length lc in km or degree??? according to param icoordchange
1
# icoordchange (=0 if position of data in km ; =1 if position of data in degree)
1
# ispec (output files required, comments to come)
11
# ireg (mode selected for background field: 0; 1; 2)
1
# xori (origin of output regular grid, min values of X)
-9.25
# yori (origin of output regular grid, min values of Y)
30
# dx (step of output grid)
.125
# dy (step of output grid)
.125
# nx max x of output grid
367
# ny max y of output grid
129
# valex (exclusion value)
-9999.0
# snr signal to noise ratio (not yet used as such, still set as 4th value of data.dat)
0.5
# varbak variance of the background field
0.6
```

[param.par](#)

Coastlines files generation: driver configuration

In `Climatology` directory:

- Edit the `driver` file and choose a flag number for boundary lines and coastlines generation:

Table 1: driver options for coastlines generation

Comment line	Flag value and corresponding action
Boundary lines and coastlines generation:	0 : no action is performed
	1 : generation of contour files of boundaries and coastlines
	2 : generation of advection UV files of velocities along coasts
	3 : generation of contour files and advection UV files

```
Data extraction: 1 do it, 0 do nothing, -1 press coord, -10 pressure+Saunders
0
boundary lines and coastlines generation: 0 nothing, 1: contours, 2: UV, 3: 1+2
3
cleaning data on mesh: 1, 2: RL, 3: both, 4: 1 + outliers elimination, 5: =4+2
0
minimal number of data in a layer. If less, uses data from any month.
0
```

Figure 2: driver file configuration example.

Coastlines files generation: output

In `Climatology` directory

- Run `divadoall`

A `newinput` directory is created which contains:

- `divaparam`: a subdirectory where coastline files `coast.cont.100xx` are stored
- `divaUVcons_all`: a subdirectory where velocity field files are stored

Copy `divaparam` and `divaUVcons_all`
to your `input` directory.

Outline

Getting Godiva and installation

Diva input info files

Data sets and domain grid preparation

Depths data sets extraction

Topography preparation & Coastlines files generation

Cleaning of data sets

Optimisation of L and λ parameters

Producing a climatology

The analysis

Using advection fields

Using reference fields

Detrending

Data Cleaning: input files

In `input` directory:

- `divadata`: directory which contains data set files of the considered layers.
- `divaparam`: directory which contains coastline `coast.cont.100xx` files for all considered layers.
- the `contour.depth` file.
- a `param.par` file.

Data Cleaning: input files

In `Climatology` directory

- Provide `varlist`, `yearlist` and `monthlist` files.
- Edit the `driver` file,
- Choose a flag number for data cleaning and
- give the considered minimum layer and maximum layer numbers.

Data Cleaning: driver configuration

Table 2: *driver* options for data cleaning

Comment line	Flag value and corresponding action
cleaning data on mesh	0 : no action is performed
	1 : cleaning data out of the mesh
	2 : generation of relative length (RL) fields
	3 : cleaning data out of the mesh and generations of RL fields
	4 : cleaning data set files from outliers
5 : generations of RL fields and cleaning data set files from outliers	

Data extraction: 1 do it, 0 do nothing, -1 press coord, -10 pressure+Saunders
0
boundary lines and coastlines generation: 0 nothing, 1: contours, 2: UV, 3: 1+2
0
cleaning data on mesh: 1, 2: RL, 3: both, 4: 1 + outliers elimination, 5: =4+2
5
minimal number of data in a layer. If less, uses data from any month.
0
Parameters estimation and vertical filtering:
0
Minimal L
0.5
Maximal L
3.
Minimal SN
0.1
Maximal SN
50.0
Analysis and reference field:
0
lowerlevel number
3
upperlevel number
25

Figure 3: *driver* file configuration example.

Data Cleaning: output

In `Climatology` directory:

Run `divadoall`.

A `newinput` directory is created and contains:

- `divadata` subdirectory which contains cleaned data sets
- `divadata` subdirectory which contains relative length files if generated

Copy the content of
`newinput/divadata` and
`newinput/divaparam`
to `input/divadata` and `input/divaparam`
directories.

Outline

Getting Godiva and installation

- Diva input info files

Data sets and domain grid preparation

- Depths data sets extraction

- Topography preparation & Coastlines files generation

- Cleaning of data sets

- Optimisation of L and λ parameters

Producing a climatology

- The analysis

- Using advection fields

- Using reference fields

- Detrending

Parameters optimisation: input

In `input` directory provide:

- `divadata` directory which contains the data set files of the considered depths.
- `divaparam` directory which contains coastline `coast.cont.100xx` files of the considered basin.
- The `contour.depth` file.
- A (template) `param.par` file.

Parameters optimisation: input files

In `Climatology` directory:

- Provide `varlist`, `yearlist` and `monthlist` files
- Edit the `driver` file and give a flag number for parameters optimisation and bounds for correlation length (L) and signal-to-noise (λ) parameters.

```
0
Parameters estimation and vertical filtering:
-30
Minimal L
0.5
Maximal L
3.
Minimal SN
0.5
Maximal SN
50.0
Analysis and reference field:
0
```

Figure 4: driver file configuration example.

Parameters optimisation: driver configuration

Table 3: *driver* options for parameters optimisation.

Comment line	Flag value and corresponding action
Parameters optimisation and vertical filtering	0 : no action is performed
	1 : estimation for each level of correlation length L parameter
	2 : estimation for each level of signal to noise ratio (λ) parameter
	-1 : estimation and vertical filtering of L parameter
	-2 : estimation and vertical filtering of λ parameter
	3 : estimation for each level of L and λ parameters
	-3 : estimation and vertical filtering of L and λ parameters
	10 : estimation of L parameter for each level using data mean distance as a minimum
	-10 : estimation of L parameter using data mean distance as a minimum and vertical filtering
	30 : estimation of λ and L parameters for each level, using data mean distance as a minimum for L
-30 : estimation and vertical filtering of λ and L parameters, using data mean distance as a minimum for L ,	

Parameters optimisation: output

In `Climatology` directory:

- Run the `divadoall` script file.

A `newinput` directory is created and contains:

`divaparam` subdirectory with `param.par.100xx` files and summary files of the optimisation and filtering procedure.

Copy the content of `newinput/divaparam`
to `input/divaparam` directory

Outline

Getting Godiva and installation

- Diva input info files

Data sets and domain grid preparation

- Depths data sets extraction

- Topography preparation & Coastlines files generation

- Cleaning of data sets

- Optimisation of L and λ parameters

Producing a climatology

- The analysis**

- Using advection fields

- Using reference fields

- Detrending

Producing a Climatology: input

In `input` directory:

- `divadata` directory which contains data sets for the considered layers,
- `divaparam` directory which contains:
 - coastlines `coast.cont.100xx` files,
 - coastlines `param.par.100XX` files.
- the `contour.depth` file,
- a `param.par` file if not provided in `divaparam`

Producing a Climatology: input & and driver

In `Climatology` directory:

- Provide

```
varlist,  
yearlist and  
monthlist files.
```

- Edit the `driver` file and choose a flag number for analysis.

```
Analysis and reference field:  
1  
lowerlevel number  
5  
upperlevel number  
25  
4D netcdf and Metadata XML metadata files generation:  
1  
gnuplot plots: 0 or 1  
0  
Data detrending: number of groups, 0 if no detrending.  
0
```

Figure 5: driver file configuration example.

Producing a Climatology: input & and driver

In `Climatology` directory:

Table 4: driver options analyses & climatologies production.

Comment line	Flag value and corresponding action	
Analysis and reference fields	0 : no action is performed	
	1 : Perform analyses defined by a set of input files: <code>varlist</code> , <code>yearlist</code> , <code>monthlist</code> , <code>constandrefe</code> and the files in <code>input/</code> directory	
	2 : generation of reference field	
	3 : perform analyses as in 1 based on vertically filtered background	
	11 : perform analyses using a $\log(\text{data})-\exp(\text{analysis})$ transformations	
	13 : perform analyses using the anamorphosis transformation	
	14 : perform analyses using a user defined transformation	
	21 : perform reference fields using a $\log(\text{data})-\exp(\text{analysis})$ transformations	
	23 : perform reference fields using the anamorphosis transformation	
	24 : perform reference fields using user defined transformation	
	<u>Adding 100 to flag values 1, 11, 13 and 14 allows to perform the same action using a reference field for each layer generated on the basis of all data from the two neighbouring layers in addition to the layer data set.</u>	
	<u>Adding 100 to flag values 2, 21, 23 and 24 allows to perform reference fields with the same action using all data from the two neighbouring layers in addition to the layer data set</u>	

Run `divadoall` script file.

Producing a Climatology: output

An `output/3Danalysis` directory
is created and contains:

- The 4D climatology NetCDF file:

```
Temperature.19002010.4Danl.nc
```

- subdirectories:

`Fields`: contains all Diva analyses 2D-fields

`Meshes`: contains depths meshes for each layer

- 3D NetCDF and binary (GHER format) files:

```
Temperature.19002010.nnm.100xx.100yy.anl.nc
```

```
Temperature.19002010.nnm.100xx.100yy.fieldgher.anl
```

- + 4D netcdf files (`Temperature.4Danl.nc`) if `netcdf flag = 11` or `-11` !

Outline

Getting Godiva and installation

- Diva input info files

Data sets and domain grid preparation

- Depths data sets extraction

- Topography preparation & Coastlines files generation

- Cleaning of data sets

- Optimisation of L and λ parameters

Producing a climatology

- The analysis

- Using advection fields**

- Using reference fields

- Detrending

Production of a Climatology using advection fields

In `input` directory provide:

- `divadata` directory (data sets)
- `divaparam` directory
(`coast.cont.100xx` and `param.par.100xx` files)
- `divaUVcons_all` directory which contains velocity fields:
(GHER-format) binary files. (+ see `asctobin`)
- the `contour.depth`
- a `param.par` if not provided in `divaparam`

In `input/divaUVcons_all` provide

- `constraint.dat` (one line) file.

10	0
----	---

example: `constraint.dat` file

Production of a Climatology using advection fields

In `Climatology` directory:

- provide a `constandrefe` file:

Table 5: Example of `constandrefe` file.

```
# advection flag
1
# reference field flag
0
# variable year code
00000000
# variable month code
0000
```

- Provide `varlist`, `yearlist` and `monthlist` files.
- Edit the `driver` file and choose a flag number for analysis.
- Execute `divadoall`.

Outline

Getting Godiva and installation

- Diva input info files

Data sets and domain grid preparation

- Depths data sets extraction

- Topography preparation & Coastlines files generation

- Cleaning of data sets

- Optimisation of L and λ parameters

Producing a climatology

- The analysis

- Using advection fields

- Using reference fields**

- Detrending

Data extraction for reference field

In `input` directory:

- the `contour.depth` file

In `Climatology` directory provide:

- `datasource` file (ODV4 spreadsheet(s) path)
- `varlist`, `yearlist` and `monthlist` files

<code>varlist</code>	<code>yearlist</code>	<code>monthlist</code>
Temperature	19002010	0103

- `qflist` file if desired
- Edit the `driver` file and choose a flag number for data extraction
- Run `divadoall` script file.

The variable(s) data set files are stored in `input/divadata` directory

Production reference fields: inputs

In `input` directory:

- `divadata` directory (data sets)
- `divaparam` directory
(`coast.cont.100xx` and `param.par.100xx` files)
- the `contour.depth`
- a `param.par` if not provided in `divaparam` with value equal to zero for `ireg` (`ireg= 0`)

In `Climatology` directory:

- Provide `varlist`, `yearlist` and `monthlist` files.
- Edit the `driver` and choose flag value 1 for data cleaning.
- and flag value 2, 21, 23 or 24 for analysis.
- Run `divadoall` script file.

Production reference fields: output

A `newinput` directory is created and contains:

- `divarefe` subdirectory which contains reference fields (Diva 2D binary files) in GHER-format.

In `output/3Danalysis` directory:

- `Fields`: contains all Diva analyses 2D-fields.
- 3D NetCDF files:

```
Temperature.19002010.0103.100xx.100yy.ref.nc
```

- Binary 3D files (GHER-format):

```
Temperature.19002010.0103.100xx.100yy.fieldgher.ref
```

Copy the content of `newinput/divarefe` to
`input/divarefe_all`

Producing Climatology using reference fields

In `input` directory:

- `divadata` directory (data sets)
- `divaparam` (`coast.cont.100xx` and `param.par.100xx`)
- `divarefe_all` directory which contains reference fields
- the `contour.depth` file.

In `Climatology` directory:

- `constandrefe` file:

```
# advection flag  
0  
# reference field flag  
1  
# variable year code  
19002010  
# variable month code  
0103
```

Using reference fields

In `Climatology` directory:

- `varlist`, `yearlist` and `monthlist` files
- Edit `driver` file and choose a flag number for analysis.
- Run `divadoall` script file.

Results will be stored in `output/3Danalysis` directory.

Outline

Getting Godiva and installation

- Diva input info files

Data sets and domain grid preparation

- Depths data sets extraction

- Topography preparation & Coastlines files generation

- Cleaning of data sets

- Optimisation of L and λ parameters

Producing a climatology

- The analysis

- Using advection fields

- Using reference fields

- Detrending**

Detrending

In `input` directory provide:

- `divadata` directory where data set files have more than five columns (5th, 6th, ... contain the information in which class the data point belongs)
- same other inputs as for normal run

In `Climatology` directory
provide the usual input text files and:

- Edit the `driver` file and
- choose a flag number for detrending a value (less or equal to the number of groups) present in your data set

Run `divadoall` script file.

- Results will be stored in

`output/3Danalysis` directory

To go further...

- Result layers are *stacked* together



To go further...

- Result layers are *stacked* together
- Problems may occur between two levels...

To go further...

- Result layers are *stacked* together
- Problems may occur between two levels...
- ... so stabilisation is required

